



L4000 SERIES DIGGER DERRICK



 **TEREX TELELECT**
simple, available and cost effective


STANDARD FEATURES AND EQUIPMENT

- Singel Lift Cylinders
- Box Fabricated Booms
- Full Pressure Hydraulic Controls
- Self-Aligned Swivel Ball Bushings
- Custom Made Zoned Load Chart
- Continuous Unrestricted Rotation
- 50 Gallon Hydraulic Oil Reservoir
- Steel Hydraulic Second Section
- Full Capacity Fiberglass Hydraulic Third Section
- Meets or Exceeds ANSI A10.31
- 100° of Boom Travel (+80° to -20°)

OPTIONAL EQUIPMENT

- Tilt Pole Plummer
- Transferable Pole Buddy
- Diggers/Augers
- Various Types of Outriggers
- Hydraulic Overload Protection
- Platforms
- Top Controls
- Jibs
- Single Stick Control

WORKING ENVELOPE

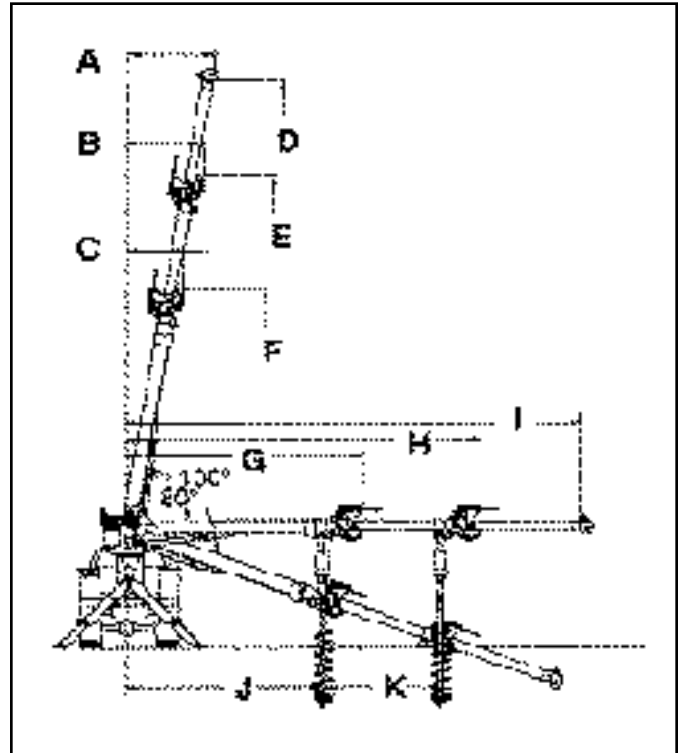

CAPACITIES & DIMENSIONAL DATA

Model	Maximum Capacity	Capacity @ 10 ft. Radius	Load Radius			Sheave Height			Horizontal Reach			Digging Radius	
			A	B	C	D	E	F	G	H	I	J	K
L4040													
TM Winch	26,590 lb (12,061 kg)	10,110 lb (4,586 kg)	5.6 ft (1.7 m)	4.2 ft (1.7 m)	2.8 ft (0.9 m)	41.5 ft (12.6 m)	33.6 ft (10.2 m)	25.8 ft (7.9 m)	15.5 ft (4.7 m)	23.5 ft (7.2 m)	31.5 ft (9.6 m)	13.0 ft (4.0 m)	8.0 ft (2.4 m)
PG Winch	20,960 lb (9,507 kg)	9,480 lb (4,300 kg)	5.4 ft (1.6 m)	4.7 ft (1.4 m)	3.3 ft (1.0 m)	40.9 ft (12.5 m)	32.7 ft (10.0 m)	24.8 ft (7.6 m)	14.6 ft (4.5 m)	22.6 ft (6.9 m)	30.8 ft (9.4 m)	13.0 ft (4.0 m)	8.0 ft (2.4 m)
L4042													
TM Winch	25,070 lb (11,372 kg)	10,000 lb (4,536 kg)	5.8 ft (1.8 m)	4.4 ft (1.3 m)	3.0 ft (0.9 m)	42.5 ft (13.0 m)	34.6 ft (10.5 m)	26.8 ft (8.2 m)	16.5 ft (5.0 m)	24.5 ft (7.5 m)	32.5 ft (9.9 m)	14.0 ft (4.3 m)	8.0 ft (2.4 m)
PG Winch	19,960 lb (9,054 kg)	9,250 lb (4,196 kg)	5.6 ft (1.7 m)	4.8 ft (1.5 m)	3.4 ft (1.0 m)	41.9 ft (12.8 m)	33.7 ft (10.3 m)	25.8 ft (7.9 m)	15.6 ft (4.8 m)	23.6 ft (7.2 m)	31.8 ft (9.7 m)	14.0 ft (4.3 m)	8.0 ft (2.4 m)
L4045													
TM Winch	23,670 lb (10,737 kg)	9,820 lb (4,454 kg)	6.3 ft (1.9 m)	4.7 ft (1.4 m)	3.1 ft (0.9 m)	45.5 ft (13.9 m)	36.6 ft (11.2 m)	27.7 ft (8.4 m)	17.5 ft (5.3 m)	26.5 ft (8.1 m)	35.5 ft (10.8 m)	15.0 ft (4.6 m)	9.0 ft (2.7 m)
PG Winch	19,020 lb (8,627 kg)	8,990 lb (4,078 kg)	6.1 ft (1.9 m)	5.2 ft (1.6 m)	3.6 ft (1.1 m)	44.8 ft (13.7 m)	35.7 ft (10.9 m)	25.8 ft (8.2 m)	16.6 ft (5.1 m)	25.6 ft (7.8 m)	34.8 ft (10.6 m)	15.0 ft (4.6 m)	9.0 ft (2.7 m)

Photographs and illustrations represented in this literature are for informational purposes only and may depict optional or additional equipment not offered as standard. Always refer to the appropriate operator's manual for safe and proper operation of Terex Telelect equipment. Terex Telelect reserves the right to make design changes as necessary.

For More Information:



TEREX TELELECT IS A UNIT OF TEREX CRANES

600 Oakwood Road
PO BOX 1150
Watertown, SD 57201
USA

Phone: (605) 882-4000
Facsimile: (605) 882-1842

www.terexlift.com
E-mail: watertown@terexlifting.com